

**PUBLISHED BY THE NATIONAL ASPHALT  
PAVEMENT ASSOCIATION**

Page 18

Page 24

Page 37

PRSR STD  
US POSTAGE PD  
FARGO ND  
PERMIT # 43

  
 5116 P1-5364-\*\*\*\*\*AUTO\*\*SCH 3-DIGIT 600  
 Thomas Kuennen  
 EXPRESSWAYSONLINE.COM  
 PO BOX 774  
 LINCOLNSHIRE IL 60069-0774



NATIONAL ASPHALT  
PAVEMENT ASSOCIATION



# Winning the **RACE TRACK** *Successful collaboration delivers high-performance pavement for Corvette Museum Race Track* **Challenge**

by Tom Kuennen

**W**hen it comes to ensuring high performance, sometimes you need more than one expert. At the National Corvette Museum Motorsports Park, when the first cars took to the track last year, the drivers enjoyed the high-quality results made possible by the collaborative effort between a contractor, a design firm, an engineering firm, a mix consultant,

two asphalt-modifier companies, and Corvette Racing.

High-performance tracks attract users, whether they are weekend warriors pushing their limits or professional racing teams fine-tuning their machines. "It really doesn't make a difference whether we are talking about amateur motorsports enthusiasts or professionals," said Mitch Wright, General Manager of the NCM Motorsports Park in Bowling

Green, Ky. "If a team comes here to test equipment, and they know they can get valid, consistent data without having their tires chewed up, we know we will have a winning facility that will appeal to drivers. Word gets around: We have a surface here that's really, really good on tires, and has good wet-weather grip."

The track was designed by Crawford and Associates with input from Corvette Racing and Pratt & Miller Engineering, and includes features reminiscent of the world-famous Circuit de la Sarthe in Le Mans, France. Scotty's Contracting & Stone LLC of Bowling Green was the general contractor and won a NAPA Quality in Construction Award from the National Asphalt Pavement Association for the quality work performed.

The \$18.5 million, 189-acre facility consists of twin circuits, a 2-mile, 13-turn, high-speed west course, and a 1-mile, 10-turn east course. Both circuits feature technical turns with straightaways and elevation changes, and the tracks can be combined to create multiple configurations. An adjacent 22-acre paddock and autocross/skid pad area is available for autocrosses — timed competitions in which drivers thread their way one at a time through a course defined by pylons or traffic cones — as well



The NCM Motorsports facility at Bowling Green, Ky. The autocross pad is located in the upper left of the photo, the National Corvette Museum at the upper right. Photo credit: NCM Motorsports Park



as for controlled skids, vehicle dynamics testing on wet and dry surfaces, drifting, and car and motorcycle shows.

### Track vs. Highway Mixes

Asphalt race track mixes differ from highway pavements significantly. For race tracks, the main concern is raveling, not rutting, which for a road course like the NCM Motorsports Park track can be dangerous due to downdrafts that produce suction beneath a car great enough to pull out loose chunks of pavement, aggregate, or even manhole covers. The lateral forces, which can cause shearing, transmitted to the mat from tires are greater on a road course, too.

Ultimately the project required more than 58,000 tons of asphalt pavement mixture, including 20,000 tons of a mix optimized for the track surface; the rest went into lower lifts. This surface mix was a 75-blow Marshall design with a heavily modified PG 82-22 binder, designed and produced at Scotty's own terminal.

"The upper two lifts were Marshall-designed using a Superpave PG binder," said mix consultant Brian D. Prowell, Ph.D., P.E., principal engineer, Advanced Materials Services LLC (AMS). "For race track applications, the Marshall method tends to ensure a little higher asphalt content in the mixture, which we need for cohesiveness and durability."

### Modified Mix

The PG 82-22 binder used was highly modified with an SBS polymer developed by Kraton Polymers, which was added at a rate of 7.5 percent by volume, more than twice as much as would be used in conventional polymer-modified binders. Evotherm, a warm-mix asphalt additive, was also incorporated to improve workability for compaction and to serve as an antistripping agent.

"Brian wrote a very tough set of specifications," said Mike Law,



Quality control of every element of the modified surface mix was critical to the successful project.  
Photo credit: Advanced Material Services LLC

P.E., Vice President of Materials for Scotty's. "Some of it we had never seen before. For liquid asphalt, he spec'd PG 82-22 with a 180°F softening point. We'd never seen a PG 82-22 and never looked at the softening point, either. We partnered with Kraton and Evotherm to develop the formula."

The use of the warm-mix additive was a twist for the mix consultant. "We had to convince Brian and Mitch to allow it" said Law. "We are very familiar with using it on state jobs and find it critical for high-profile, skid-resistant state mixes that get high-density compaction."

"In this case, we had a PG 82-22 mix that would be extremely stiff and difficult to compact," added Law. "The mixture had very angular aggregates. We've had great success in the past getting densities and better, more consistent mats using the warm-mix additive, and we were adamant that we wanted it in the mix to give them the product they wanted."

"Scotty's approached us about using highly modified asphalt (HiMA) polymer modifier and Evotherm combined as an alternate to our typical mix design," said Prowell. "The proportions that were worked out met our performance

parameters for a track mix, so we let the different ingredients into the mix without changing our end-result performance specifications."

"The stresses on a race track are much higher than those on a conventional pavement," said Bob Kluttz, Kraton Polymers US LLC. "It's not just shear vs. direct loading. With HiMA, you are increasing the resilience of the material, and its ability to 'bounce back' after the strain. Also, it increases the strength of the material, making it more resistant to cracking."

"Existing race track mix binder specs lean more toward the empirical tests, rather than the performance-related tests," said Kluttz. "With HiMA, we were able to formulate a binder with a much lower viscosity polymer, making life a lot easier for the constructors. We met the longstanding empirical tests, but we also ran the more current AASHTO M 320 standard Superpave and next-generation high-temperature M 332 test protocols on the binder, generating data that can be used to specify the material in the future."

Workability of the modified mix was the main goal. "Use of the HiMA compared to a conventional

*continued on page 20*



## Winning the Race Track Challenge

polymer results in a binder with much lower viscosity," said Kluttz. "That results in a more workable mix. The warm-mix asphalt additive lets the contractor get a very good quality pavement down in the first place, and HiMA gives it durability."

### Softening Point Spec

For this project, another parameter was added to the typical PG binder test, a softening point requirement, said Prowell. "The softening point indicates where the asphalt binder changes phase from a semi-solid to a more viscous liquid," he said. "We set the temperature at the point where aggregate might be pulled toward the surface by a hot tire. The value we specified was 180°F for the Corvette Museum track."

With a 180°F softening point, polymer modification would have to be used to ensure elastic recovery.

A sulfur crosslinking agent was added, which helped stabilize the HiMA polymer network. "You shear the polymer into the hot asphalt, and it starts to react with the asphalt," Prowell said. "The sulfur helps stabilize the internal web-like network that develops within the binder."

### Texture to Provide Grip

The mix gradation was intended to provide optimum macrotexture with the aim of minimizing damage from lateral shear forces induced by tires moving at high speed.

To enhance friction, skid-resistant aggregates were researched and analyzed by Scotty's and aggregate supplier Vulcan Materials Co. to determine the best, most cost-effective material for the track. The team selected a silica-rich limestone from the Fort Payne formation in Springfield, Tenn. It

featured a 40- to 50-percent silica content, and indicated 10.8 percent wear on the ASTM D7428 Micro-Deval test, and an L.A. abrasion test loss of 14 to 15 percent.

"They wanted an aggregate that gave a proper grip without too much tire wear," said Scotty's Law. "For most people that's granite aggregate, but the closest granite to us was in Georgia, a five-hour haul with all the costs that implies. We use skid-resistant aggregates on our state projects around here, and we thought the best quality would be a high-silica limestone out of Tennessee, a 40-mile haul."

Typical auto race track mixes utilize a polish-resistant 9.5 mm (3/8 inch) nominal maximum aggregate size (NMAS) aggregate in a 75-blow Marshall mix, and a stiff PG 82-XX binder, with the lower end depending on the climate. But the NCM track mix was different;

# DILLMAN DEPEN

**DILLMAN, INC.** a division of Astec, Inc.

34618 COUNTY HWY K • PRAIRIE DU CHIEN, WI 53821 USA • 608.326.4820 • FAX 608.326.4962 • [dillmanequipment.com](http://dillmanequipment.com)







**A binder softening point of 180°F was specified and confirmed for every tanker of binder delivered to the project. Photo credit: Advanced Material Services LLC**

Vulcan didn't produce a 3/8-inch gradation at its Springfield plant. Scotty's went back to its historical data and developed a half-inch gradation band so they could use the Tennessee material without having to recrusher it.

Because tracks like NCM Motorsports Park operate under

wet or dry conditions, rain or shine — as opposed to NASCAR ovals, which typically run only in dry conditions — pavement macrotexture was a driving consideration. "Macrotexture will have a big effect on hydroplaning. So having a little more macrotexture with the half-inch NMA helps drivers in wet weather over a 3/8-inch NMA," Prowell said. "And if you lose control, and start sliding the car, hysteresis — the friction effect in which the tire actually deforms over the larger aggregate particles — will help establish better grip. The more macrotexture, the better the hysteresis will tend to be."

### **Building the Track**

Excavation began in June 2013. A 3D model was used to guide both the excavation and paving, helping to accelerate the project. Some


half-million cubic yards of earth were moved by November 2013.

Scotty's used its own software to check grades to make sure it would be able to give the client the pavement surface they wanted. During these checks, Scotty's ended up suggesting some changes that were accepted by the client.

The area's problematic karst topography, with its abundant sinkholes and pronounced underground drainage, posed problems in earthwork, said Chris Higgins, Engineering Manager at Scotty's. "During the course of construction, we had to repair as many as 93 sinkholes on the site. Usually this meant placement of filter fabric and large stones that would allow surface water to pass through into the crevices, while providing the structural integrity we needed to construct on top of it."

*continued on page 23*

# DABLE

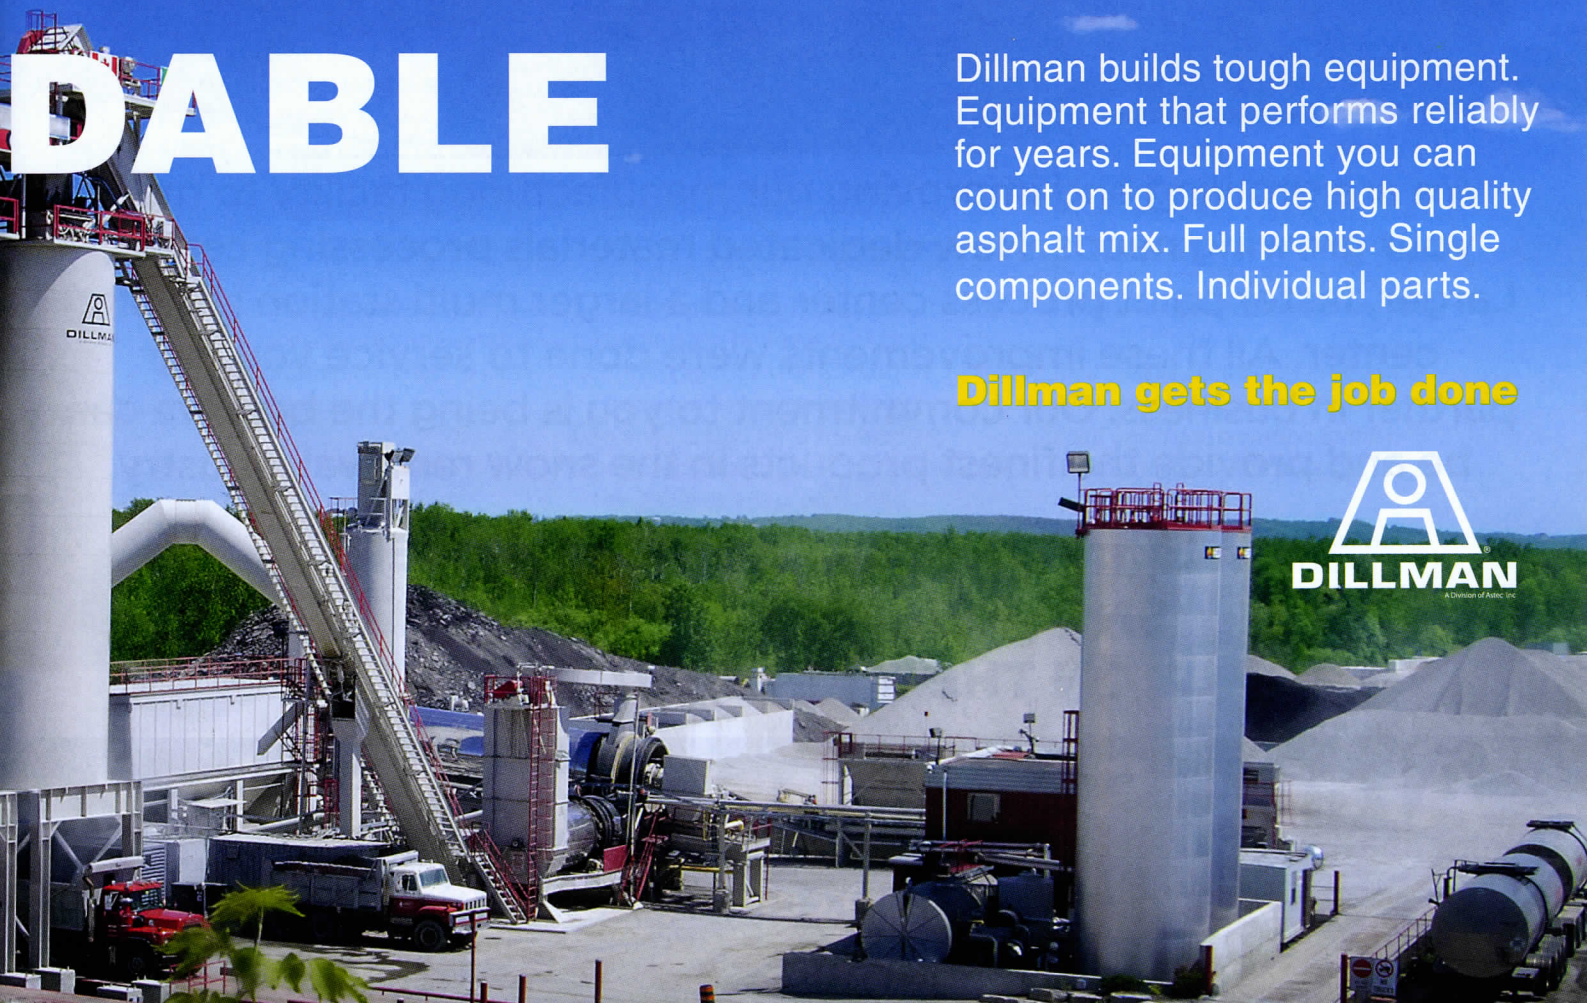


Dillman builds tough equipment. Equipment that performs reliably for years. Equipment you can count on to produce high quality asphalt mix. Full plants. Single components. Individual parts.

**Dillman gets the job done**





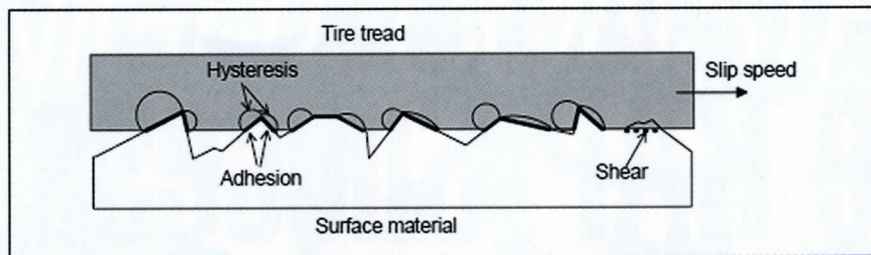


Optimal macrotexture can encourage a friction effect known as hysteresis, in which the tire deforms over the larger aggregate particles, which helps establish a better grip on the pavement. *Image credit: Advanced Material Services LLC*

After rough grading, dense-graded aggregate was laid down to a depth of 8.5 inch, next came a conventional PG 64-22 asphalt base course lift followed by two 1.5-inch lifts of the premium track wearing mix, featuring the HiMA PG 82-22 binder, warm-mix additive, and high-silica limestone.

Two pavers used in echelon to eliminate the longitudinal joint were employed for optimal quality. The track was typically 36 feet wide. Fed by material transfer vehicles to ensure consistent mixes and smooth paving,

the lead tractor paved a 16-foot wide path with the second following closely behind, paving a width of 20 feet. The average paving speed was a cautious 15 feet per minute.

Four vibratory tandem rollers followed for breakdown, intermediate, and finish rolling. For the breakdown phase, two compactors were set in high amplitude and low frequency mode, with each roller making four vibratory passes behind its designated paver to achieve 92 to 93 percent density.

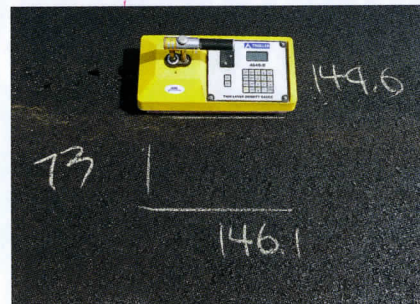

Average mat density reached 94.7 percent and average joint density while paving in echelon was 94.1 percent; the target density was 94. *Photo credit: Advanced Material Services LLC*

The other two rollers were set in high frequency and low amplitude mode for the intermediate phase, making two vibratory passes.

The 3D machine control on the pavers was used to construct the asphalt base on both the track and paddock, guaranteeing grades would be achieved per the plan in advance of a very smooth final surface. Scotty's Contracting & Stone estimated that by using 3D paving controls it saved \$250,000 compared to staking the site.

"The density on the joints was an important piece of the puzzle," said Mike O'Leary, Ingevity (MWV) Evotherm Ambassador. "If you didn't have density continuously through all the mixes, you would get irregularities in the pavement. When you look at the track now, you see joints, but they're smooth and tight."

## Driving Success

The successful collaboration resulted in a project that exemplifies how decision-making focused on constructing a high-quality pavement specific to the client's needs can work. Good communication and creative thinking, along with many of the latest technologies, delivered a high-performance race track that race car fans and drivers will enjoy for many years. **AP**

*Tom Kuennen is a freelance writer based in Lincolnshire, Ill.*



Echelon paving of the specialized surface course using two pavers at once eliminated cold longitudinal joints between pulls at the NCM Motorsports track. *Photo credit: Scotty's Contracting & Stone LLC*